

**DRYER VENT DETAIL**  
SCALE: NTS

### CEILING DIFFUSER SCHEDULE

SYMBOL	AIR QUANTITY	NECK SIZE	ROUND DUCT SIZE	FACE DIMENSION	HARD CEILING	LAY-IN CEILING
☒	0 - 60	6"	8"	12 X 12	24 X 24	
☒	65 - 150	8"	8"	16 X 16	24 X 24	
☒	155 - 195	8"	10"	16 X 16	24 X 24	
☒	200 - 250	10"	10"	20 X 20	24 X 24	
☒	255 - 395	10"	12"	20 X 20	24 X 24	
☒	400 - 550	12"	12"	24 X 24	24 X 24	
☒	555 - 595	12"	14"	24 X 24	24 X 24	
☒	600 - 745	14"	14"	24 X 24	24 X 24	
☒	750 - 1000	16"	16"	30 X 30	30 X 30	

### CEILING RETURN AIR OR EXHAUST REGISTER SCHEDULE

SYMBOL	CFM	SIZE	ROUND SIZE
☒	0 - 75	8 X 6	10 X 6
☒	80 - 105	10 X 6	12 X 6
☒	110 - 175	10 X 10	12 X 8
☒	180 - 270	12 X 12	14 X 8
☒	275 - 325	16 X 12	20 X 8
☒	330 - 800	24 X 24	26 X 10
☒	805 - 1200	24 X 24	26 X 12
☒	1205 - 1500	24 X 24	26 X 14

\* THESE SIZES ARE TO BE USED UNLESS OTHERWISE NOTED ON DRAWINGS.  
1. ALL DIMENSIONS ARE TO THE FACE UNLESS OTHERWISE NOTED ON DRAWINGS.

### MECHANICAL GENERAL NOTES

1. THE WORK DESCRIBED HEREINAFTER SHALL BE INSTALLED SUBJECT TO THE NON TECHNICAL SPECIFICATIONS. THIS SECTION APPLIES TO ALL AIR CONDITIONING, SHEETMETAL, PIPING, AND AUTOMATIC TEMPERATURE CONTROL WORK.

2. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE HIS WORK WITH THAT OF OTHER TRADES. SEE ARCHITECTURAL SECTIONS FOR A DESCRIPTION OF WORK AND SEQUENCE OF CONSTRUCTION. THE DRAWINGS ARE ESSENTIALLY DIAGRAMMATIC IN NATURE. THEY ARE, HOWEVER, AS ACCURATE AS SCALE PERMITS AND THE CONTRACTOR SHALL FOLLOW THEM AS CLOSELY AS POSSIBLE. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY ALL CONDITIONS RELATING TO THE WORK IN THE FIELD PRIOR TO PROCEEDING WITH THE WORK. THE CONTRACTOR SHALL VERIFY ALL WALLS, PARTITIONS, AND STRUCTURAL SYSTEMS BEFORE INSTALLATION AND FABRICATION OF ANY DUCTWORK OR PIPING SYSTEMS. ALL OFFSETS REQUIRED FOR INSTALLATION OF DUCTWORK OR PIPING SHALL BE INCLUDED IN THE SCOPE OF WORK AT NO ADDITIONAL COST TO THE OWNER. THE ENGINEER SHALL BE THE SOLE INTERPRETER OF THE DRAWINGS.

3. ALL MATERIALS SHALL BE NEW AND OF BEST QUALITY AND SHALL BE THE PRODUCTS OF REPUTABLE MANUFACTURERS. MATERIALS AND EQUIPMENT SHALL BE PROPERLY STORED AND PROTECTED FROM THE WEATHER AT ALL TIMES DURING CONSTRUCTION TO PREVENT UNNECESSARY CORROSION AND ROTTING. ALL WORK SHALL BE DONE IN A NEAT AND WORKMANLIKE MANNER BY SKILLED AND COMPETENT MECHANICS. ANY WORKER CONSIDERED INCOMPETENT OR UNFIT FOR WORK ON THIS CONSTRUCTION PROJECT SHALL BE PROMPTLY REMOVED BY THE CONTRACTOR UNDER THE DIRECTION OF THE ENGINEER.

4. THE WORK SHALL COMPLY WITH ALL APPLICABLE CODES, REGULATIONS, ORDINANCES, ETC., WHETHER FEDERAL, STATE OR LOCAL. THE CONTRACTOR SHALL BE RESPONSIBLE FOR SECURING ANY PERMITS AND PAYING ANY FEES REQUIRED IN ORDER TO PROCEED WITH THE WORK.

5. THE CONTRACTOR IS REQUIRED TO ATTEND ALL CONSTRUCTION CONFERENCES INCLUDING THE PRE-BID CONFERENCE, THE FIRE-CONSTRUCTION CONFERENCE AND THE OWNER'S PROGRESS MEETINGS AS SCHEDULED BY THE ARCHITECT OR THE OWNER. FAILURE TO MAKE REFERENCES IN THE SPECIFICATIONS TO ANY ITEMS OF THE WORK SHOWN BY THE DRAWINGS AND NECESSARY TO THE COMPLETION OF THE WORK SHALL NOT RELIEVE THE CONTRACTOR OF THE FULL RESPONSIBILITY TO FURNISH THE MATERIALS AND PERFORM THE WORK OF SUCH ITEMS IN A MANNER COMPARABLE TO OTHER ITEMS OF SIMILAR NATURE FOR WHICH DETAILED SPECIFICATIONS ARE INCLUDED. DRAWINGS AND SPECIFICATIONS ARE INTENDED TO CLEARLY SET FORTH ALL WORK, AND THE DETAILED DESCRIPTION IS ADDED TO ASSIST IN ESTABLISHING THE SCOPE AND THE LOCATION OF THE SEVERAL PARTS OF THE WORK. COLLECTIVELY, THEY SHALL GOVERN AND CONTROL THE SCOPE, CHARACTER AND DESIGN OF THE WORK, AND ANY ITEM CALLED FOR IN ANY ONE OF THE DOCUMENTS SHALL BE AS THOUGH REQUIRED IN ALL.

6. ALL CUTTING AND PATCHING SHALL BE DONE BY WORKMEN SKILLED IN THE TRADES INVOLVED. ALL CUTTING SHALL BE DONE IN SUCH A MANNER AS NOT TO ENDANGER OR DAMAGE FACILITIES. ALL PATCHING SHALL FINISH FLUSH AND SMOOTH AND SHALL MATCH EXISTING ADJOINING SURFACES.

7. SEE GENERAL REQUIREMENTS FOR ELECTRICITY AND WATER. THE MECHANICAL CONTRACTOR IS RESPONSIBLE FOR FURNISHING ALL FUEL REQUIRED FOR THE OPERATION OF HIS CONSTRUCTION EQUIPMENT.

8. ALL FINISHED FIELD INSTALLED PRESSURE PIPING SYSTEMS SHALL BE TESTED.

9. WORK CONSISTS OF FURNISHING ALL LABOR, MATERIALS, TOOLS, EQUIPMENT, TRANSPORTATION, SCAFFOLDING, SERVICES, SUPERVISION, PLANT, AND PERFORMING ALL OPERATIONS REQUIRED TO COMPLETE ALL WORK IN ACCORDANCE WITH THESE SPECIFICATIONS AND AS INDICATED ON THE APPLICABLE DRAWINGS, SUBJECT TO TERMS AND CONDITIONS OF THE CONTRACT. THE CONTRACTOR IS REQUIRED TO HAVE A QUALIFIED AND EXPERIENCED GENERAL SUPERINTENDENT AND AN EXPERIENCED SUPERINTENDENT FOR EACH TRADE.

10. THE LATEST EDITIONS OF THE ESTABLISHED STANDARDS OF THE FOLLOWING ORGANIZATIONS, AND INDIVIDUAL STANDARDS NAMED SHALL BE FOLLOWED THE SAME AS IF THEY WERE FULLY WRITTEN HEREIN AND CONSTITUTE A PART OF THE SPECIFICATION REQUIREMENTS EXCEPT WHERE OTHERWISE SPECIFIED.

1. FLORIDA BUILDING CODE, 2023 8TH EDITION.  
2. FLORIDA PLUMBING CODE, 2023 8TH EDITION.  
3. FLORIDA MECHANICAL CODE, 2023 8TH EDITION.  
4. NFPA 10, NATIONAL ELECTRICAL CODE  
5. NFPA 101, LIFE SAFETY CODE  
6. NFPA 90A, STANDARD FOR THE INSTALLATION OF AIR CONDITIONING AND VENTILATION SYSTEMS  
7. NFPA 98, STANDARD FOR THE INSTALLATION OF BLOWER AND EXHAUST SYSTEMS  
8. OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION REGULATIONS.

THE FOREGOING RULES, STANDARDS, REGULATIONS, SPECIFICATIONS, RECOMMENDATIONS AND REQUIREMENTS SHALL BE FOLLOWED BY THE CONTRACTOR AS MINIMUM REQUIREMENTS. THEY SHALL NOT RELIEVE THE CONTRACTOR FROM FURNISHING AND INSTALLING HIGHER GRADES OF MATERIALS AND WORKMANSHIP WHICH ARE SPECIFIED HEREIN OR INDICATED ON THE DRAWINGS.

11. THE INTERIOR FACE OF DUCTWORK HOUSING SUPPLY, RETURN OR EXHAUST AIR DIFFUSERS, REGISTERS OR GRILLES SHALL BE PAINTED 'FLAT-BLACK' 60 WHEN VIEWED FROM BELOW AND ABOVE NOTHING BEYOND SURFACE OF AIR DEVICE IS VISIBLE.

12. THERMOSTAT/SENSOR WIRING TO BE RUN INSIDE WALLS/COLUMNS OR IN ATTIC SPACE. THE USE OF WIREMOLD OR EXTERNAL RACEWAY SHALL BE APPROVED BY THE ENGINEER.

13. A COMPLETE CERTIFIED TEST AND BALANCE REPORT SHALL BE SUPPLIED BY AN INDEPENDENT CERTIFIED TEST AND BALANCE AGENCY TO THE ENGINEER IN WRITING PER AAABC TEST AND BALANCE REPORT MANUAL (LATEST EDITION) PRIOR TO JOB ACCEPTANCE BY OWNER. THE REPORT SHALL BE SIGNED AND SEALED BY A REGISTERED ENGINEER IN THE STATE OF FLORIDA.

14. THE SUBMISSION OF A BID OR PROPOSAL WILL BE CONSTRUED AS EVIDENCE THAT THE CONTRACTOR HAS FAMILIARIZED HIMSELF WITH THE PLANS, SPECIFICATIONS AND BUILDING SITE. CLAIMS MADE SUBSEQUENT TO THE PROPOSAL FOR MATERIALS AND/OR LABOR DUE TO DIFFICULTIES ENCOUNTERED WILL NOT BE RECOGNIZED, UNLESS DIFFICULTIES COULD NOT HAVE BEEN FORESEEN EVEN THOUGH PROPER EXAMINATION HAD BEEN MADE.

15. ALL POWER WIRING, RELAYS, PANELS, TRANSFORMERS, DISCONNECT SWITCHES FOR HVAC EQUIPMENT SHALL BE FURNISHED AND INSTALLED BY THE ELECTRICAL CONTRACTOR. ALL CONTROL WIRING, RELAYS, PANELS SENSORS (OR THERMOSTATS) SHALL BE FURNISHED AND INSTALLED BY THE HVAC CONTRACTOR. ALL MOTOR STARTERS SHALL BE FURNISHED BY THE HVAC CONTRACTOR AND INSTALLED BY THE ELECTRICAL CONTRACTOR.

16. ALL DUCTS TO HAVE AIR EXTRACTORS (ADJUSTABLE TYPE) ON SQUARE OR RECTANGULAR TAKE-OFFS WITH SPIN-IN VOLUME DAMPERS OR ROUND OR OVAL TAKE-OFFS. SPIRAL DUCT TAKE-OFFS HAVE NO EXTRACTORS. INSTALL FLEXIBLE DUCT CONNECTORS AT ALL FANS AND AIR HANDLING UNITS.

17. FLEXIBLE DUCTS MUST COMPLY WITH UL 181 AND SHALL NOT EXCEED EIGHT FEET IN LENGTH. REMAINING BRANCH LINE SHALL BE GALVANIZED METAL WITH 2" EXTERNAL INSULATION. FLEXIBLE DUCTS SHALL HAVE FOIL BACKING (FSK TYPE).

18. ANY CONDENSATION ON SURFACES OF HVAC EQUIPMENT, DUCTWORK OR PIPING WILL BE CORRECTED BY THE CONTRACTOR. WRAP WITH INSULATING TAPE OR EXTERNAL INSULATION HAVING A VAPOR BARRIER.

19. INSULATION OUTSIDE OF THE BUILDING SHALL BE WRAPPED WITH ALUMINUM INSIDE ALL SUPPLY, RETURN EXHAUST AND FRESH AIR DUCTS SHALL BE GALVANIZED METAL, COMPLETELY SEALED, FINISHED WITH 2" EXTERNAL INSULATION HAVING VAPOR RETARDING JACKET (FSK TYPE). INSULATION SHALL COMPLY WITH UL 181 AND MUST HAVE FLAME SPREAD RATINGS OF 25 AND A SMOKE DEVELOPED RATING NO HIGHER THAN 50.

20. ROOM SENSORS OR THERMOSTATS SHALL BE MOUNTED AT 48 INCHES ABOVE FINISHED FLOOR.

21. THERMOSTATS TO BE 1 DAY PROGRAMMABLE WITH DIGITAL DISPLAY. PROVIDE AND INSTALL A LOCK BOX FOR ALL THERMOSTATS.

22. SMOKE DETECTORS (SEE DRAWINGS) SHALL BE IONIZATION TYPE AS APPROVED BY THE ENGINEER. COORDINATE THE INSTALLATION WITH THE ELECTRICAL CONTRACTOR. CONTRACTOR SHALL VERIFY THAT DETECTORS ARE COMPATIBLE WITH FIRE ALARM SYSTEMS. IF UNIT SELECTION IS NOT COMPATIBLE THE CONTRACTOR SHALL PURCHASE AND INSTALL PROPER UNIT TO INSURE LIFE SAFETY PROTECTION. SMOKE DETECTORS SHALL AUTOMATICALLY SOUND AUDIBLE ALARM AND TURNOFF FANS.

23. FURNISH AND INSTALL ACCESS DOORS (8"X8" MINIMUM) IN ALL DRYWALL CEILINGS FOR ACCESS TO MECHANICAL EQUIPMENT.

24. COORDINATE THE INSTALLATION OF ALL AUX. COND. DRAINS LOCATED IN WALLS WITH THE GENERAL CONTRACTOR. COORDINATE THE INSTALLATION OF ALL MAIN COND. DRAINS LOCATED IN WALLS AND CHASES WITH THE PLUMBING CONTRACTOR.

25. THE CONTRACTOR SHALL NOT FABRICATE ANY AIR DISTRIBUTION DUCTWORK UNTIL IT HAS BEEN VERIFIED THAT SUFFICIENT CLEARANCES ARE AVAILABLE FOR THE INSTALLATION OF HVAC SYSTEMS CONSIDERING REQUIREMENTS FOR PIPING, LIGHT FIXTURES, CEILING SYSTEMS, FLOOR SYSTEMS, FOUNDATIONS, AND STRUCTURES. IF A CONFLICT ARISES CONTACT THE ENGINEER FOR PERMISSION TO REROUTE SYSTEM. ALL DUCTWORK SHALL BE ROUTED AT THE EXPENSE OF THE CONTRACTOR.

26. DEVIATION FROM MATERIALS, METHODS, AND PROCEDURES SET FORTH HEREIN MUST BE APPROVED IN WRITING BY THE ENGINEER. APPROVAL WILL NOT BE GIVEN UNLESS THE ENGINEER IS SATISFIED THAT THE PROPOSED SYSTEMS ARE SUPERIOR IN PERFORMANCE, DURABILITY, LONGEVITY, AND RELIABILITY TO THAT SPECIFIED.

27. APPROVALS OF EQUIPMENT OR SYSTEMS OTHER THAN THAT SHOWN MUST BE WITHIN TEN (10) WORKING DAYS PRIOR TO BID DATE.

28. ALL DUCT AND PIPE SIZES SHOWN ARE CLEAR NET INSIDE DIMENSIONS.

29. ALL AIR DISTRIBUTION DUCTWORK SHALL BE AIR TIGHT AND FREE OF LEAKS, AND SHALL BE INSPECTED FOR LEAKS PRIOR TO INSTALLATION OF FAN UNITS OR FINISHED FLOOR/CEILING SYSTEM. DUCTWORK SHALL BE SEALED WITH AIR DUCT SEALER PER SMACNA STANDARDS AND UL RATING.

30. EQUIPMENT, DUCTWORK, DAMPERS, LOUVERS, GRILLES, REGISTERS, DIFFUSERS, OTHER AIR DISTRIBUTIONS, EQUIPMENT AND MATERIALS SHALL CONFORM TO THE LATEST EDITIONS OF THE FOLLOWING:

(A) ASHRAE  
(B) SBCCI  
(C) SMACNA  
(D) NFPA  
(E) AMCA STANDARD HANDBOOK 99  
(F) AIR DIFFUSION COUNCIL TEST CODE 106/103  
(G) SBCCI STANDARD MECHANICAL CODE  
(H) ANSI  
(I) ASHRAE  
(J) AGA  
(K) AGA  
(L) UL FIRE RESISTANCE DIRECTORY

31. INSULATE ALL REFRIGERANT LINES WITH 3/4" ARMAFLEX OR EQUIVALENT INSULATION. PROVIDE WITH WEATHERPROOF ALUMINUM JACKET ON LINES OUTSIDE.

32. ALL MATERIALS SHALL BE LISTED BY THE UNDERWRITERS LABORATORIES (UL) OR NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA).

33. REFRIGERANT PIPING SHALL BE SIZED IN STRICT ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS FOR LIQUID, VAPOR HORIZONTAL AND VAPOR RISERS.

34. TUBING SHALL BE INSTALLED WITH MOISTURE INDICATOR SIGHT GLASS LOCATED IN THE LIQUID LINE ADJACENT TO THE OUTDOOR UNIT.

35. THOROUGHLY CLEAN REFRIGERANT PIPE FITTINGS BEFORE ASSEMBLY. ALL JOINTS ARE TO BE MADE WITH SILVER ALLOY BRAZE MELTING ABOVE 1100 DEGREES F. NO ACID FLUX IS TO BE USED ON ANY JOINT.

36. ALL CONDENSATE DRAINS SHALL TERMINATE INTO ROOF GUTTER, SECURE TO ROOF SEAMS WITH APPROVED CLIP.

37. ALL WORK AND MATERIALS SHALL BE WARRANTED (PARTS AND LABOR) FOR A PERIOD OF ONE YEAR FROM DATE OF FINAL ACCEPTANCE BY OWNER. AN ADDITIONAL WARRANTY (PARTS ONLY) SHALL INCLUDE 4 YEARS ON ALL COMPRESSORS, WITH NINE YEARS ON ALL HEAT EXCHANGERS.

38. CONTRACTOR SHALL SUPPLY TO THE ENGINEER 6 SETS OF SUBMITTALS ON THE FOLLOWING ITEMS:

A. AIR DISTRIBUTION (DIFFUSER, GRILLE AND REGISTERS)  
B. HEATING/AIR CONDITIONING EQUIPMENT  
C. DAMPERS  
D. FANS  
E. INSULATION MATERIALS  
F. CONTROLS  
G. PIPING

NOTE: THESE ITEMS MUST BE APPROVED BY THE ENGINEER PRIOR TO CONTRACTOR ORDERING.

39. ALL FEES, PERMITS, TAPS, LICENSE, INSURANCE, AND BONDS SHALL BE PAID BY THIS CONTRACTOR FOR ALL RELATED WORK.

40. ROUTE REFRIGERANT PIPING AS SHOWN ON DRAWINGS. MANUFACTURE TO SIZE REFRIGERANT PIPING.

41. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED UNLESS EMBOSSED AND THE SHA AUTHENTICATION CODE MUST BE VERIFIED ON ELECTRONIC COPIES.

### EXHAUST FAN SCHEDULE

UNIT DESIGNATION		EF-1
AIR FLOW	CFM	70
STATIC PRESSURE	IN. WC	0.5
FAN MOTOR POWER	HP	1/200U
FAN SPEED	RPM	732
DRIVE		DIRECT
SONES	SONES	1.5
WEIGHT	LBS	10
ELECTRICAL CHARACTERISTICS	V/PH	115/1
MANUFACTURER		GREENHECK
MODEL NUMBER		5P-B10

NOTES:  
1. MOUNT ALL EXHAUST FANS IN ACCORDANCE WITH MPG INSTRUCTIONS.  
2. PROVIDE FAN SPEED CONTROLLERS FOR ALL EXHAUST FANS.  
3. WIRE EXHAUST FANS IN ROOMS THEY SERVE TO LIGHT SWITCH.  
4. PROVIDE BACK-DRAFT DAMPER FOR ALL EXHAUST  
5. EF-4 TO HAVE TIME CLOCK AND OVER RIDE SWITCH IN RR. OVER RIDE TO RUN FOR 15 MINUTES BEFORE SHUTTING OFF.

UNIT TAG	NOMINAL CAPACITY	MAKE	MODEL SERIES	SYSTEM DATA		REFRIGERANT										OUTDOOR UNIT					INDOOR UNIT											
				COOLING ONLY CAPACITY (BTU/H)	AHRI TOTAL CAPACITY (BTU/H)	SENSIBLE CAPACITY @ 47°F (BTU/H)	HEATING CAPACITY @ 17°F (BTU/H)	AIR FLOW (HIGH) CFM	AIR FLOW (LOW) CFM	HSPF2	SEER2	REFR. TYPE	BASE REFR. CHARGE AT MAX. LINE LENGTH (LBS)	ROOM HEIGHT (FT)	MIN ROOM AREA PER AHRAE 15 AT MAX. LINE LENGTH (SQFT)	MAX. LINE LENGTH (FT)	OUTDOOR MODEL	COMPRESSOR STAGES / TYPE	VOLTAGE	MCA	MOCP	WEIGHT (LBS)	INDOOR MODEL	VOLTAGE	MCA	MOCP	WEIGHT (LBS)					
DFU-1	34	DAIKIN	OTERRA	HEAT PUMP	9,000	8,140	10,900	6,600	424	261	9.0	20	R32	1.15	1.60	8	41.8	66	RX008ASBU	INVERTER	115/1	14.9	15	59	FTX008ASBU	IDU POWRD BY ODU	NA	NA	1" WASHABLE	STANDARD WIRELESS T-STAT	5/8	18.0

SCHEDULE NOTES:  
PROVIDE OUTDOOR UNIT WALL MOUNTED BRACKET.  
PROVIDE CONDENSATE PUMP, INSTALLED SEPARATELY.  
PROVIDE LONG LINE ACCESSORY AS NEEDED FOR REFRIGERANT PIPING.

### DH-1 PERFORMANCE

	@ 80°F and 60%RH	@ 73°F and 60%RH
Water Removal	70 Pints / 8.75 Gallons	55 Pints / 6.875 Gallons
Efficiency	5.0 Pints/kWh	4.79 Pints/kWh
Energy Factor	2.4 L/kWh	2.27 L/kWh
Blower	150 CFM @ 0.0" WG 140 CFM @ 0.2" WG 130 CFM @ 0.4" WG	
Fan Operating Temperature	70 Watts	
Sizing	49°F Min., 95°F Max. Up to 1,800 Sq. Ft. / 18,000 Cu. Ft.	

### ELECTRICAL

Power	580 watts @ 80°F and 60% RH
Supply Voltage	115 volt - 1 phase - 60 Hz
Current Draw	5.1 amps Plug Type B
Power Cord	9', 115 VAC, Ground (USA, MEX, CAN, JPN)
Circuit Requirement	15 Amps

### SPECIFICATIONS

Duct Connections	8" Round Inlet, 8" Round Outlet
Drain Connection	3/4" Threaded Female NPT
Refrigerant	R410A, 15 oz.
Unit Dimensions	12"W x 12"H x 28"D
Unit Weight	55 lbs.

### SHIPPING

Shipping Dimensions	15"W x 16"H x 31"D
Shipping Weight	65 lbs.
Pallet Quantity	12 per pallet
UPC Number	859029004632
Shipping Options	UPS and LTL

MODEL 4033730 SANTA FE


### FEATURES

- Small footprint (12" x 12" x 22") fits low profile spaces
- Rotatable exhaust outlet provides for horizontal or vertical discharge
- Ducting option for fresh outdoor air ventilation
- Onboard dehumidistat with optional DEH 3000/R digital control
- Features MERV-13 filter for superior air filtration
- Push button reset for transformer protection

ROBIN WINTON, STATE OF FLORIDA, PROFESSIONAL ENGINEER, LICENSE NO. 56206. THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY ROBIN WINTON ON THE DATE INDICATED HERE. PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

WINTON ENGINEERING, PA  
ROBIN WINTON, PE  
2201 WOODBINE DR  
TALLAHASSEE, FL 32309  
850 561-2019  
FL #56206

KNAUER NEVER ENGINEERING, PLLC  
211W WILLOW MIST ROAD  
INLET BEACH, FL 32461  
PHONE: (850) 974-8815  
cliff@knaunevereng.com

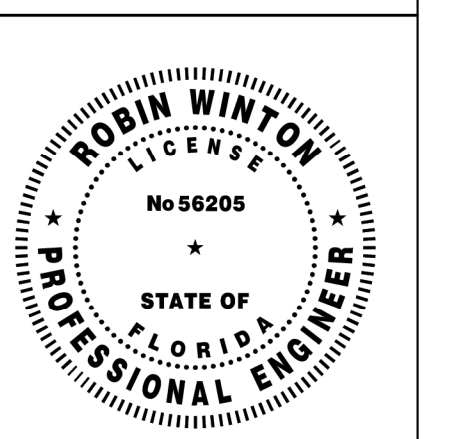

NO.	DESCRIPTION	DATE

HOLMES COUNTY EMERGENCY MANAGEMENT SERVICE EXPANSION BOARD OF COUNTY COMMISSIONERS  
HOLMES COUNTY, FLORIDA  
TITLE: MECHANICAL NOTES

PROJECT NO. SP1020  
DATE FEB 2025  
DRAWN BY RPW  
APPROVED BY RPW  
PROJECT STATUS  
SHEET NO. M1.0

